


Presence: best matches


illustrative similarities, not measurements

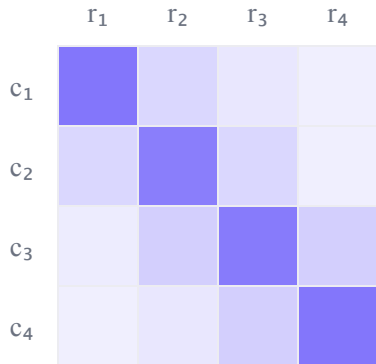

stronger fill = higher similarity

Order: monotone DTW path

descriptor positions, not elapsed time

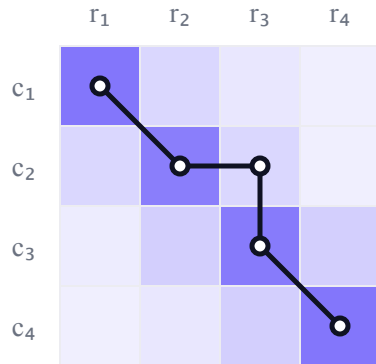

one illustrative admissible path

$$S_{ij} = \langle \varphi(c_i), \varphi(r_j) \rangle$$

$$\text{step cost: } (1 - S_{ij}) [1 + \lambda |(i-1)/m - (j-1)/n|]$$